


Pro-Wipe® 750

Polypropylene / Cellulose Composite Nonwoven Cleanroom Wiper

Pro-Wipe® 750 is a thermally bonded multi-layer composite nonwoven wiper recommended for ISO Class 5 and above environments composed of a layer of cellulose bonded between two outer layers of

polypropylene. This combination of properties provides Pro-Wipe® 750 with exceptional cleanliness, absorbency and chemical resistance to strong solvents.

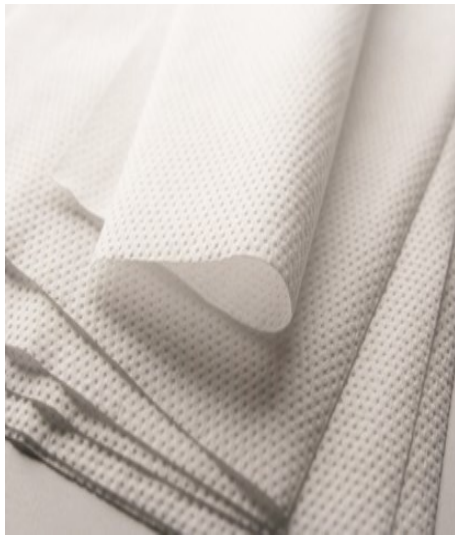

Key Attributes

- 60% polypropylene / 40% cellulose nonwoven
- Multi-layer composite with cellulose layer thermally bonded between the two polypropylene outer layers
- High loft and soft texture
- No binders or other chemical additives

Benefits

- Engineered for compatibility with solvents
- Extremely durable and pure with very low particle and fiber generation
- High absorbency to weight ratio may reduce cost in use compared to similar weight nonwovens
- Chemically compatible with common cleaning and disinfecting solutions
- Autoclavable

Environmental

- High absorbency to weight ratio may reduce wiper usage and landfill waste pounds compared to similar weight nonwovens

Applications

- Designed for use in ISO Class 5 and higher cleanroom environments
- Excellent choice for general spill pick up and cleaning surfaces
- Designed for removal of etchants, and other chemical spills
- Excellent for cleaning scratch sensitive surfaces
- Ideal for tray lining and other lab applications
- General wiping in component prep, compounding and wash areas
- Excellent for general wiping and cleaning in biomedical environments
- EC Regulation 1935 (2004) - Food contact compliant
- FDA 21 CFR - Food contact compliant

Other Class 5 and above nonwoven wipers

- BlueSorb® 750
- Durx® 570
- Durx® 670
- Durx® 770
- MicroFirst®
- MicroFirst LP®
- ProjX® 700
- Pro-Wipe® 880
- ValuClean® Plus

Pre-Wetted Option

The same wiper material can be provided in pre-wetted formats for reduced VOC emissions, increased convenience, increased productivity, improved solvent control and cleaning protocol repeatability and reduced costs.

Sterile Validated Option

For aseptic processing areas, the same wiper material can be provided in a gamma irradiated validated sterile to a 10⁻⁶ sterility assurance level. Dry and pre-wetted versions available.

www.berkshire.com

Contact: Tel 1 800 242 7000 / 1 413 528 2602
info@berkshire.com

America	Tel 1 413 528 2602	Fax 1 413 528 2614	info@berkshire.com
Europe	Tel 44 (0) 870 757 2877	Fax 44 (0) 870 757 2878	enquiries@berkshire.uk.com
SE Asia	Tel 65 6252 4313	Fax 65 6252 4312	enquiries@berkshire.com.sg
Japan	Tel 81 3 5827 2380	Fax 81 3 5827 2382	master@berkshire.co.jp

Technical Data:

Attribute		Units	Value	Test Method
Basis Weight		g/m ²	65.0	TAPPI T-410
Caliper		µm	290	TAPPI T-411
Fibers	≥100µm	fibers/cm ²	7.1	IEST-RP.CC004.3, Sec 6.1.3 / Sec 6.2.2
Particles	≥0.5µm	x10 ³ /cm ²	6.2	IEST-RP.CC004.3, Sec 6.1.3 / Sec 6.2.1
Sorbency	Capacity	mL/m ²	424	IEST-RP.CC004.3, Sec 8.1 modified / Sec 8.2 modified
	Efficiency	mL/g	6.5	
	Rate	seconds	2	
Non-Volatile Residue	DI Water	g/m ²	0.080	IEST-RP.CC004.3, Sec 7.1.2
	IPA	g/m ²	0.044	
Ions	Na ⁺	ppm	100	IEST-RP.CC004.3, Sec 7.2.2
	K ⁺	ppm	29	
	Ca ⁺⁺	ppm	0.14	
	Mg ⁺⁺	ppm	0.032	
	Cl ⁻	ppm	56	

Notes:

- Technical data represented in this table are typical values at the time of publication. These should not be used as product specifications.
- Due to differences in test methods applied and equipment utilized by different wiper manufacturers, valid product comparisons may only be obtained through side-by-side testing in the same test facility, under similar conditions
- Third party testing can be performed upon request

Order Information:

Product	Number	Size	Shts/pk	Pks/cs	Style
Pro-Wipe® 750	PW750.0404.20	4x4" (10x10cm)	400	20	Stacked
Pro-Wipe® 750	PW750.0909.20	9x9" (23x23cm)	150	20	Stacked
Pro-Wipe® 750	PW750.1212.20	12x12" (30x30cm)	75	20	Stacked

Other Berkshire Products



Wipers



Glove Liners




Mop Systems



Documentation Systems



Face Masks



Swabs